


**Burnt Store Marina  
Signage Standards / 2010**



**Punta Gorda, FL**

Association Main Entrance / Identification Signs

Acceptable Colors/Shape - Option 1 Shape

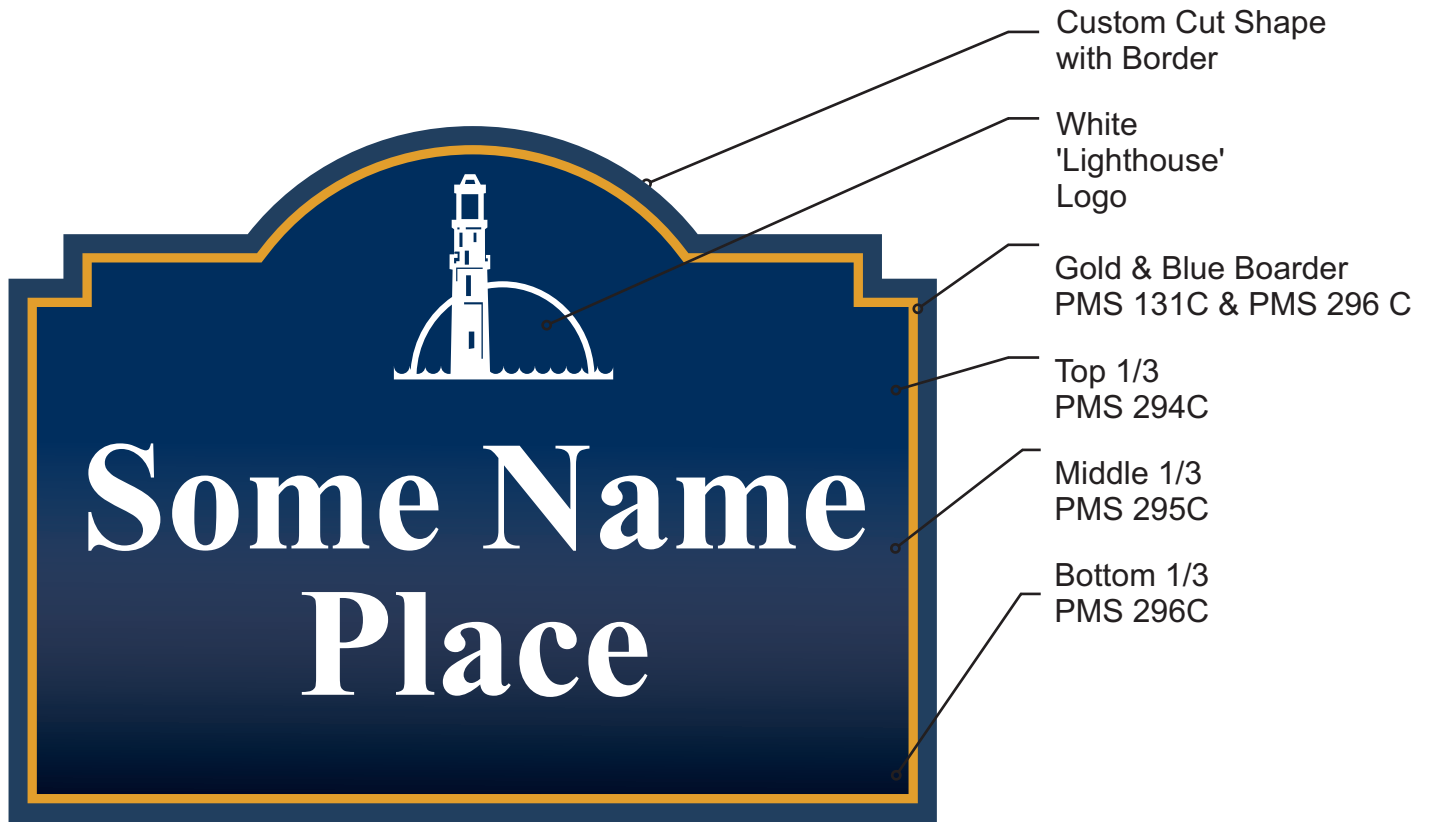

All proposed signage (including repair or painting) must be submitted to Section 22ARC for approval and meet Section 22 signage criteria including color, shape and font style.



Option 2 Shape


Acceptable Fonts

Association Main Entrance / Identification Signs - *Times New Roman Bold* - Times New Roman Bold  
 Directional Signage - *Copperplate Gothic Bold* - **COPPERPLATE GOTHIC BOLD**  
 Burnt Store Marina Text - *Zapfchan MdLt BT* - *Burnt Store Marina*  
 Regulatory signs to match Federal MUTCD (Manual on Uniform Traffic Control Devices)

Association logos may be used in place of or in addition to BSM Lighthouse logo. Exceptions may be permitted with ARC approval.



Revisions: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

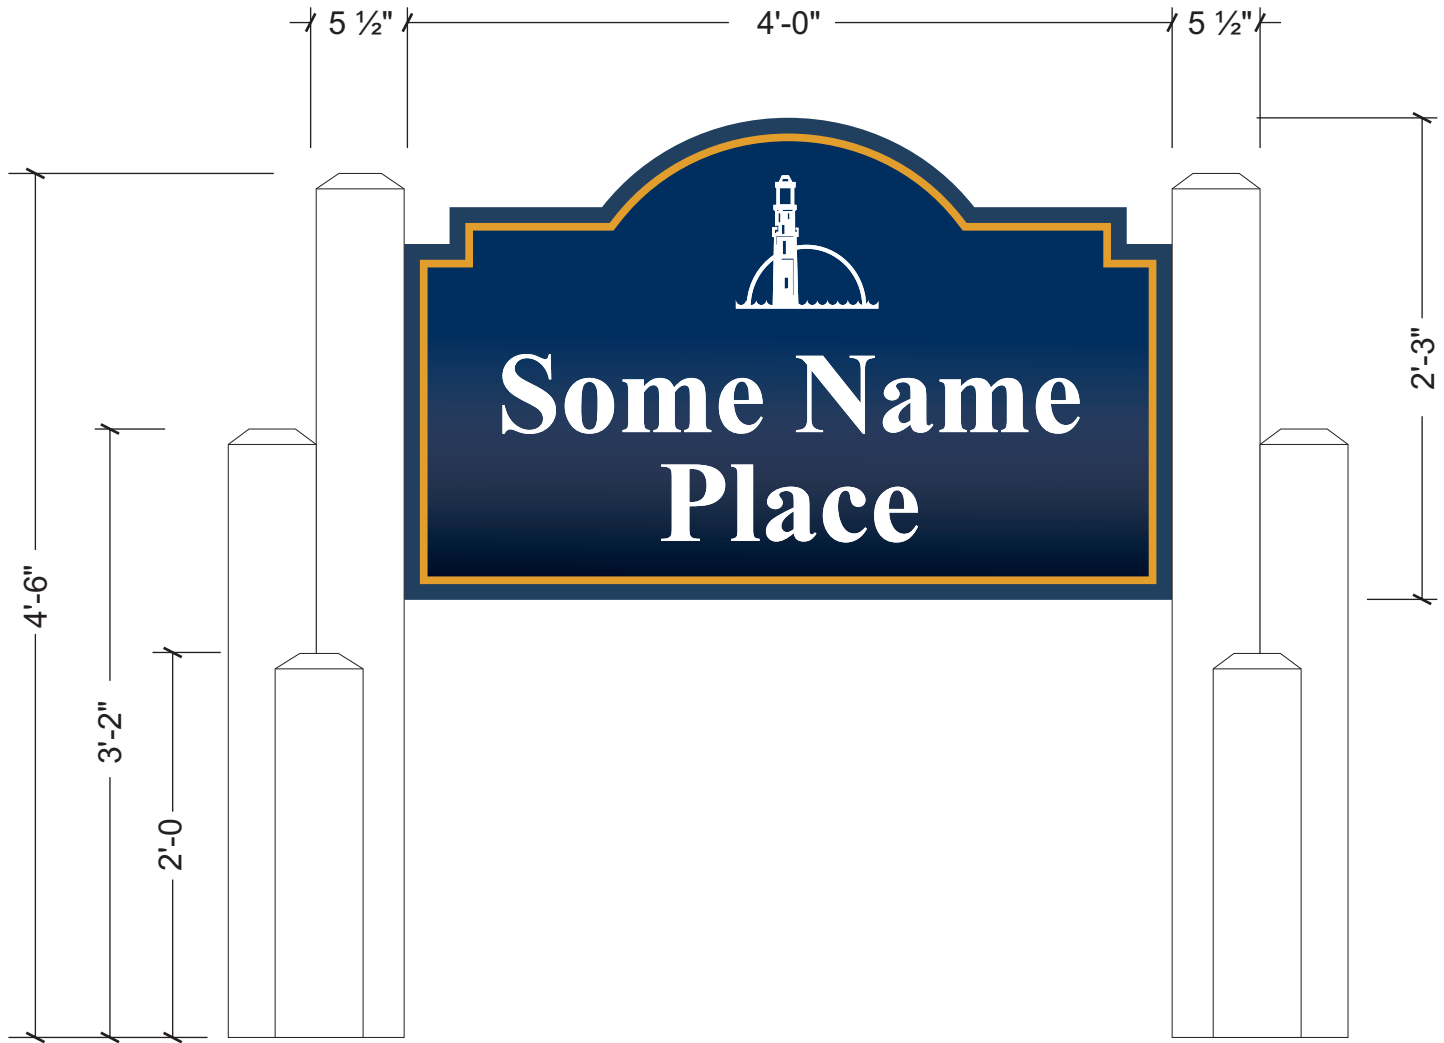

**Single or Double Faced Blasted Sign Face Mounted Between 5 1/2" Chamfer Cut Posts**

**HDU SPECIFICATIONS**


- Routed exterior shapes with raised border and recessed white text & logo
- 1 1/2" Thick HDU Blasted with or with out wood grain detail
- HDU to be blasted, primed and painted with a finishing clear coat
- Blasted HDU sign face backed with .125 aluminum backer panel
- Mount in between 5 1/2" posts at staggered lengths, painted white
- Colors to match approved color criteria & shape

**CEDAR SPECIFICATIONS**

- Routed exterior shapes with raised border and recessed white text & logo
- 1.75" thick cedar wood - sand blasted, primed, painted & sealed with clear coat
- Mount in between 5 1/2" posts at staggered lengths, painted white
- Colors to match approved color criteria & shape



Revisions: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

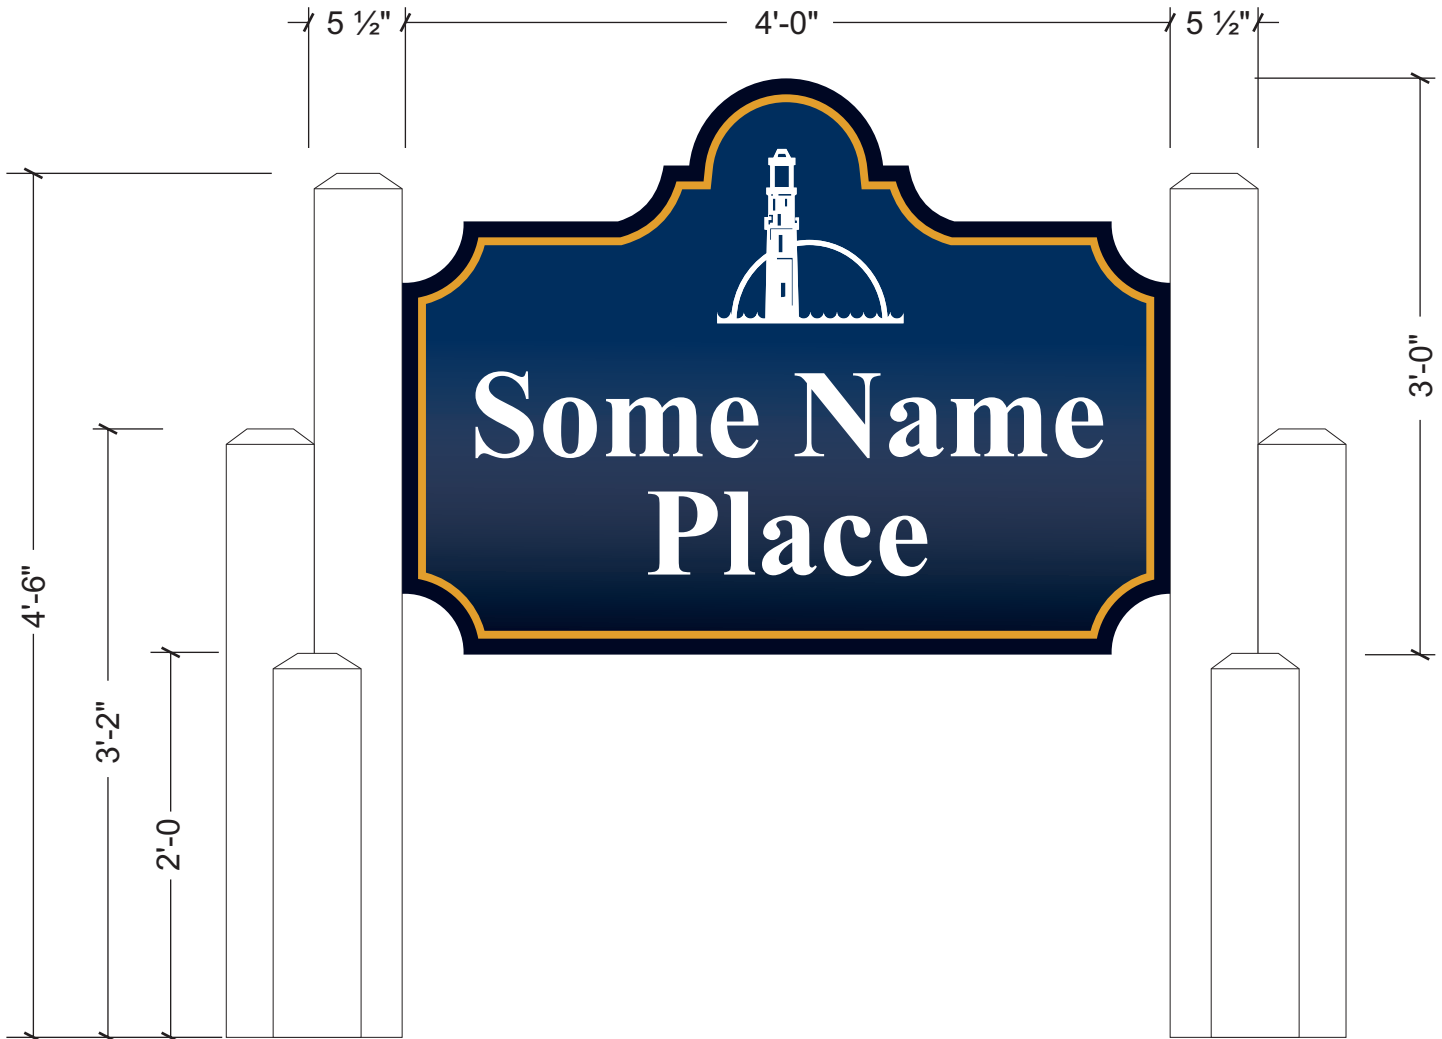

**Single or Double Faced Blasted Sign Face Mounted Between 5 1/2" Chamfer Cut Posts**

***HDU SPECIFICATIONS***

- Routed exterior shapes with raised border and recessed white text & logo
- 1 1/2" Thick HDU Blasted with or with out wood grain detail
- HDU to be blasted, primed and painted with a finishing clear coat
- Blasted HDU sign face backed with .125 aluminum backer panel
- Mount in between 5 1/2" posts at staggered lengths, painted white
- Colors to match approved color criteria & shape


***CEDAR SPECIFICATIONS***

- Routed exterior shapes with raised border and recessed white text & logo
- 1.75" thick cedar wood - sand blasted, primed, painted & sealed with clear coat
- Mount in between 5 1/2" posts at staggered lengths, painted white
- Colors to match approved color criteria & shape



Revisions: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

Also in Option 2 Shape

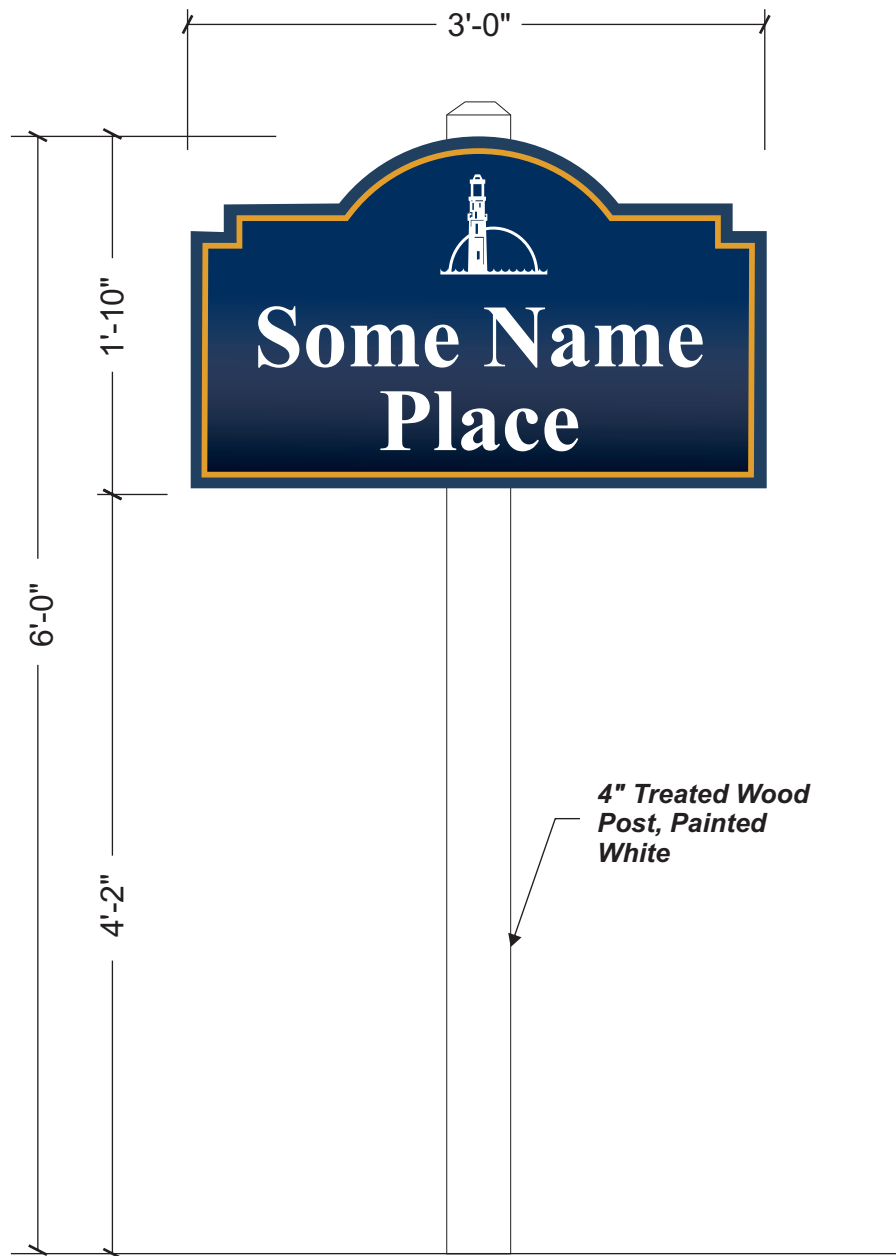

**Single or Double Faced Blasted Sign Face Mounted Between 5 1/2" Chamfer Cut Posts**

**HDU SPECIFICATIONS**

- Routed exterior shapes with raised border and recessed white text & logo
- 1 1/2" Thick HDU Blasted with or with out wood grain detail
- HDU to be blasted, primed and painted with a finishing clear coat
- Blasted HDU sign face backed with .125 aluminum backer panel
- Mount in between 5 1/2" posts at staggered lengths, painted white
- Colors to match approved color criteria & shape

**CEDAR SPECIFICATIONS**

- Routed exterior shapes with raised border and recessed white text & logo
- 1.75" thick cedar wood - sand blasted, primed, painted & sealed with clear coat
- Mount in between 5 1/2" posts at staggered lengths, painted white
- Colors to match approved color criteria & shape



Revisions: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_


Also in Option 2 Shape




**Informational/Direction Sign Mounted to Chamfer Cut Wood Post**

- .080 Alum. white engineer grade reflective sheeting
- Routed shape
- 3/8" holes centered top & bottom (Inset 1")
- Vinyl printed graphics/ 1st surface - *UV protecting finish*
- Mounted to treated 4" cedar posts with chamfer cut top, painted white
- Colors to match accepted BSM sign standards



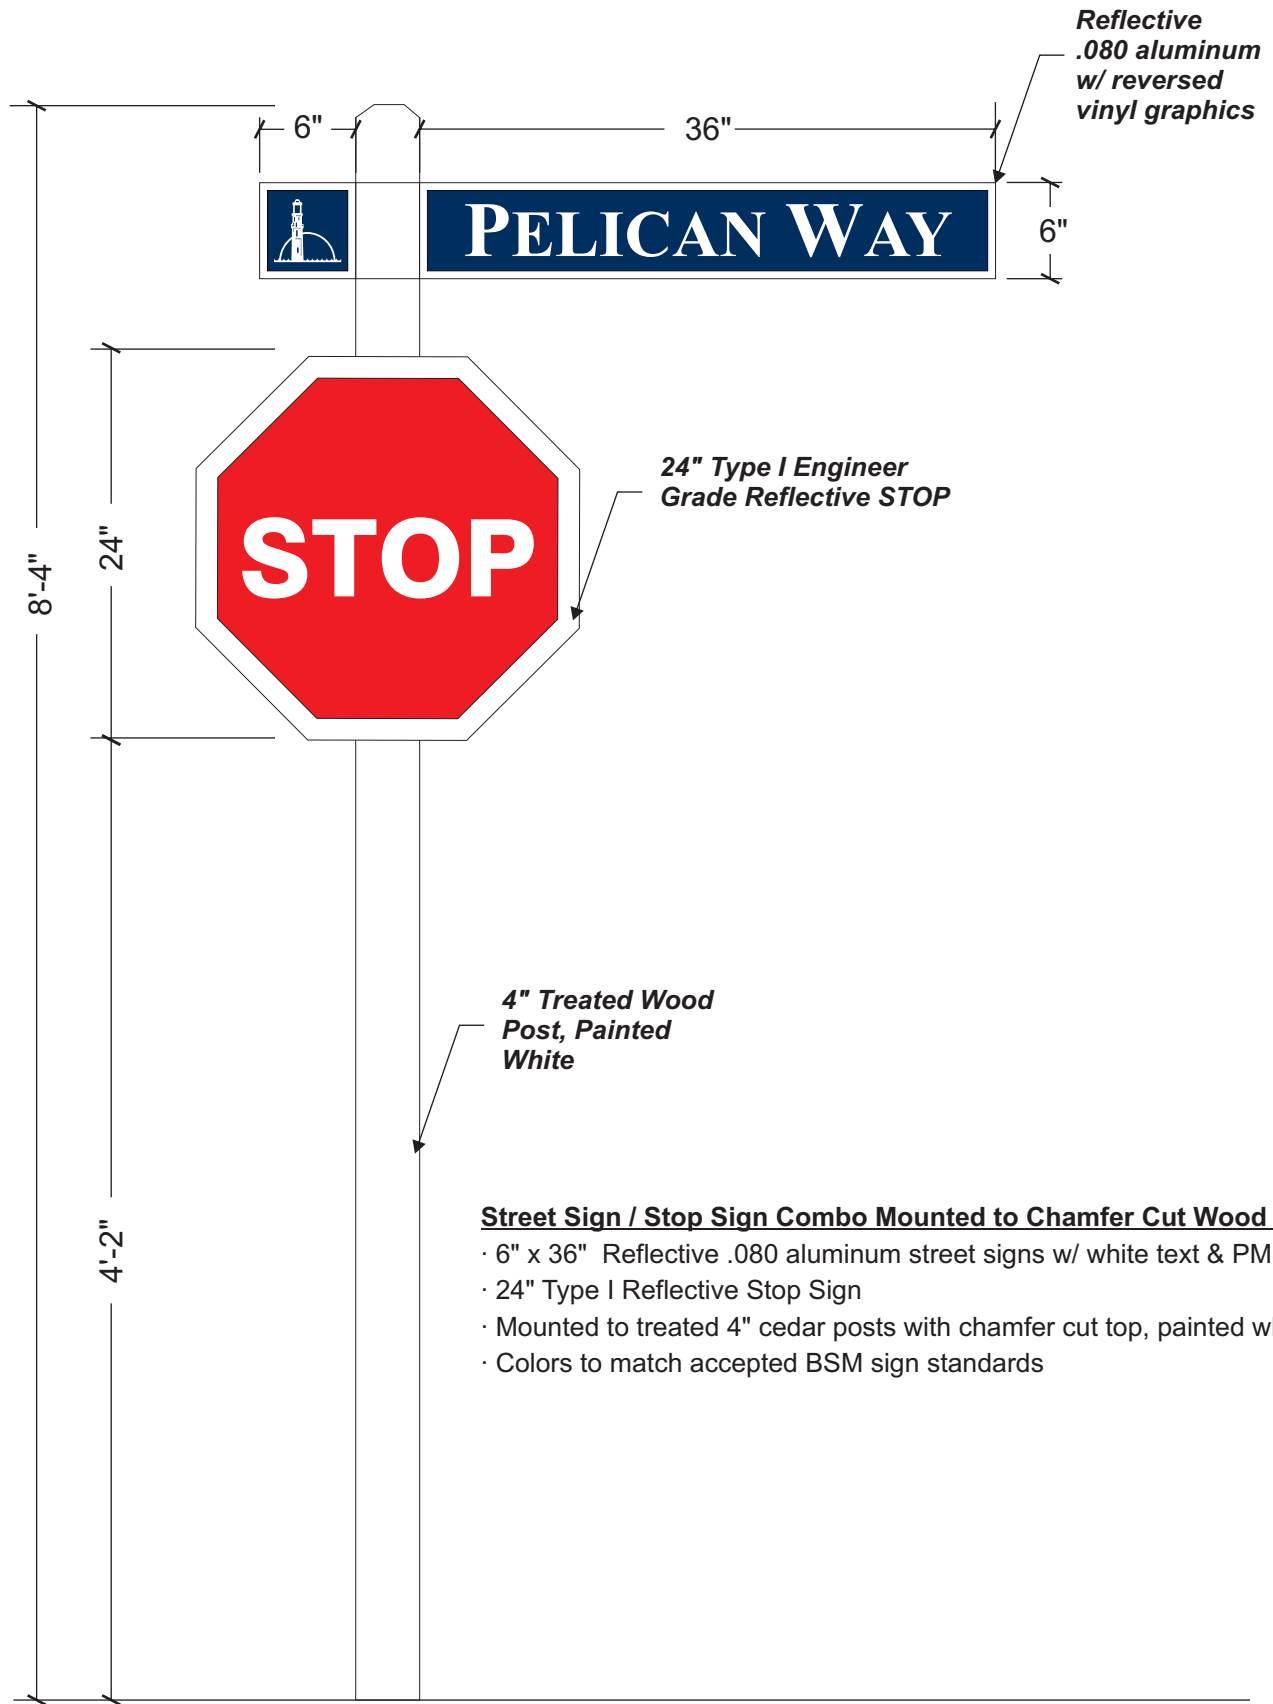

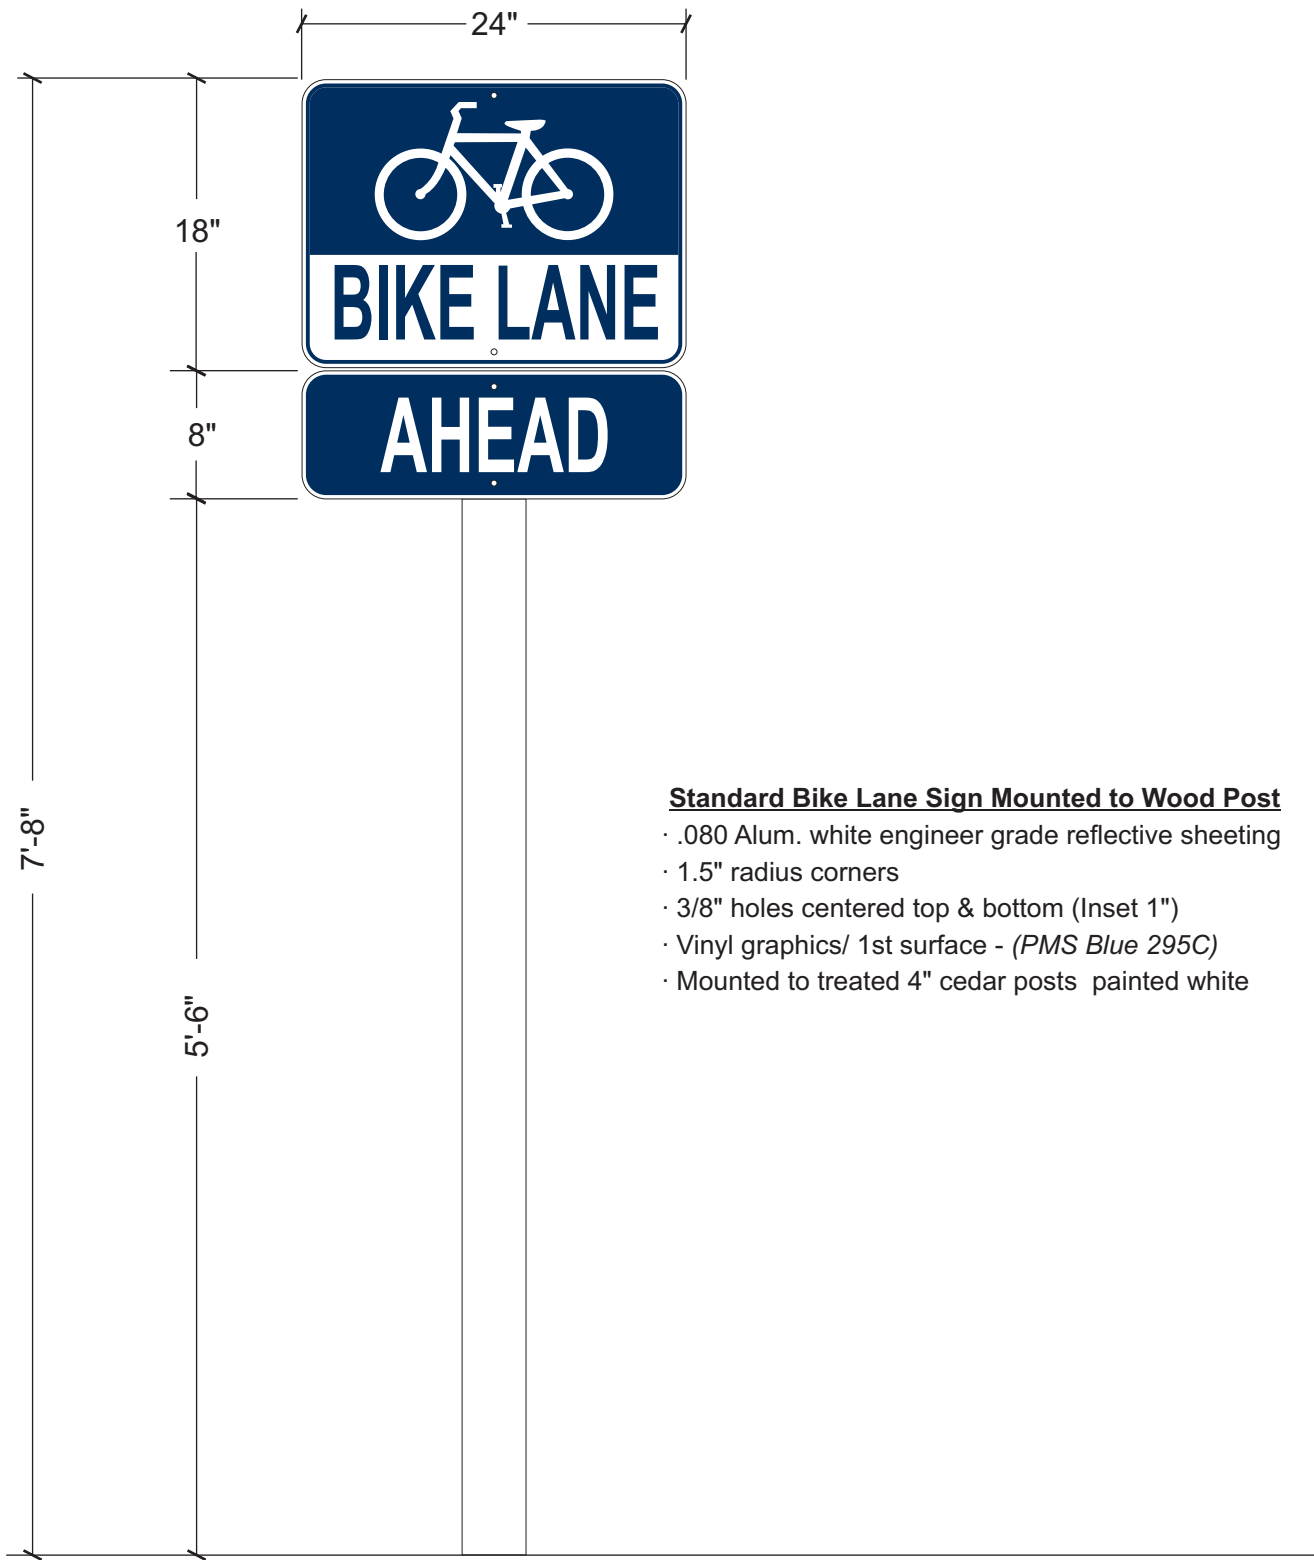


**Standard Bike Lane Sign Mounted to Wood Post**

- .080 Alum. white engineer grade reflective sheeting
- 1.5" radius corners
- 3/8" holes centered top & bottom (Inset 1")
- Vinyl graphics/ 1st surface - (PMS Blue 295C)
- Mounted to treated 4" cedar posts painted white



Revisions: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_



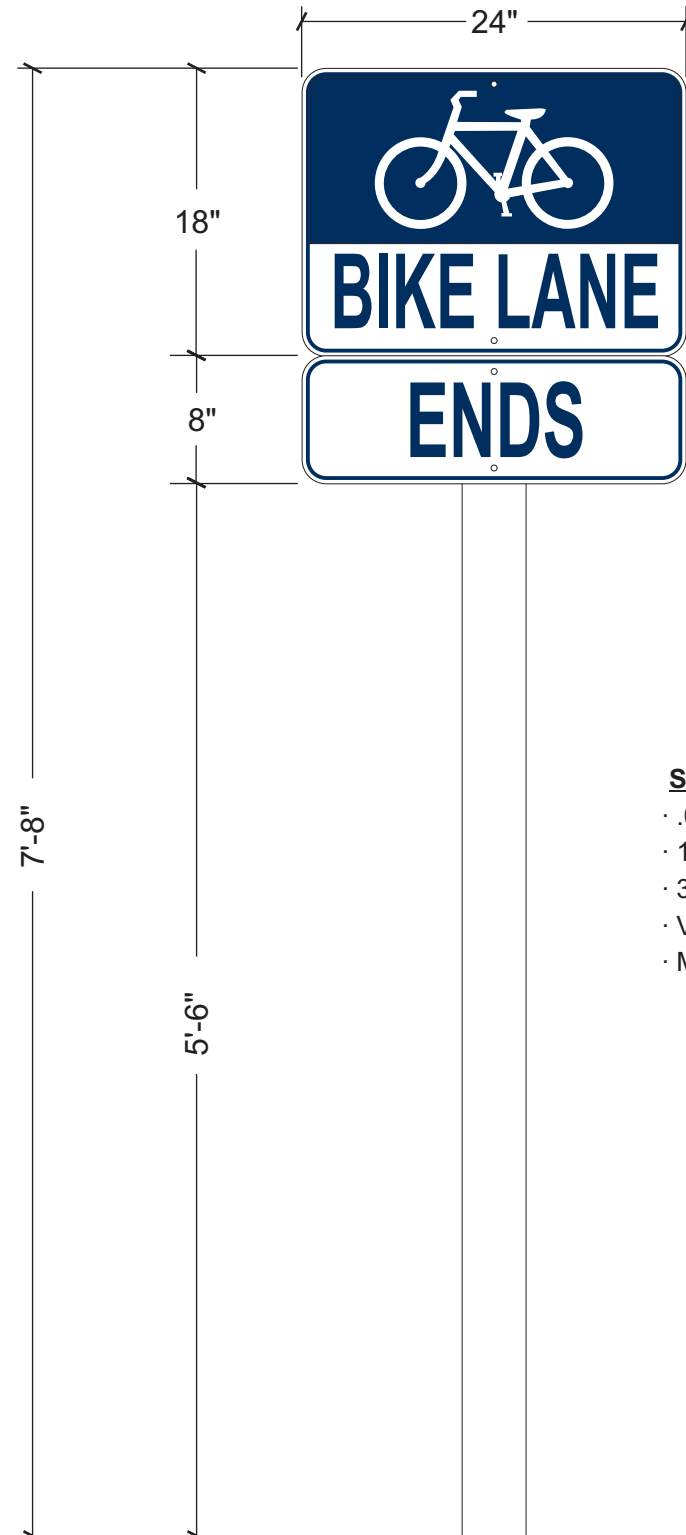

**Standard Bike Lane Sign Mounted to Wood Post**

- .080 Alum. white engineer grade reflective sheeting
- 1.5" radius corners
- 3/8" holes centered top & bottom (Inset 1")
- Vinyl graphics/ 1st surface - (PMS Blue 295C)
- Mounted to treated 4" cedar posts painted white



Revisions: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_